


# PRODUCT DATASHEET

## LS AY PFM -CSW/P2/50/P

LED STRIP VALUE-500 RGB PROTECTED | IP65 protected RGB LED strips with 500 lm/m for general applications

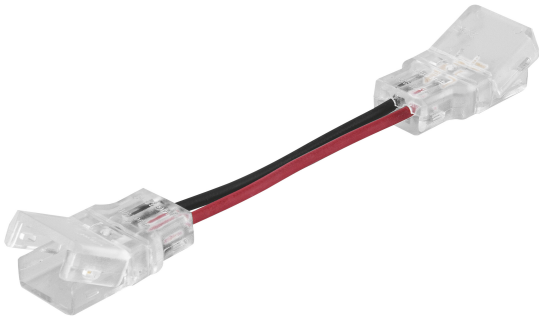

---

### Areas of application

- General indoor illumination

---

### Product benefits

- Easy installation of connector, no manual wiring required
- Tool-free installation

## TECHNICAL DATA

### Electrical data

Nominal voltage	0...36 V
Nominal current	5000 mA

### Dimensions & Weight

Length	102.0 mm
Cable length	50 mm
Width	15,0 mm
Height	7 mm
Product weight	7.00 g

### Colors & materials

Product color	Transparent
---------------	-------------

### Temperatures & operating conditions

Ambient temperature range	-15...+45 °C
Temperature range in operation	-15...+45 °C

### Certificates & Standards

Type of protection	IP66
--------------------	------

### LOGISTICAL DATA

Temperature range at storage	-35...+85 °C
------------------------------	--------------

## DOWNLOAD DATA

### DOWNLOAD DATA



Catalogs

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075273245	BAG 2	80 mm x 120 mm x 5 mm	15.00 g	0.05 dm <sup>3</sup>
4058075273252	Shipping box 100	180 mm x 100 mm x 180 mm	829.00 g	3.24 dm <sup>3</sup>
4058075273269	Shipping box 1,000	520 mm x 380 mm x 210 mm	9057.00 g	41.50 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.