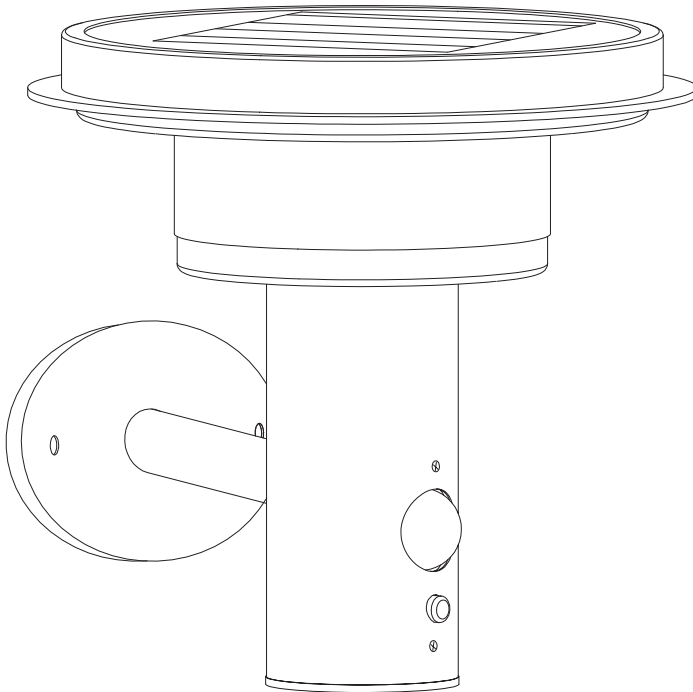
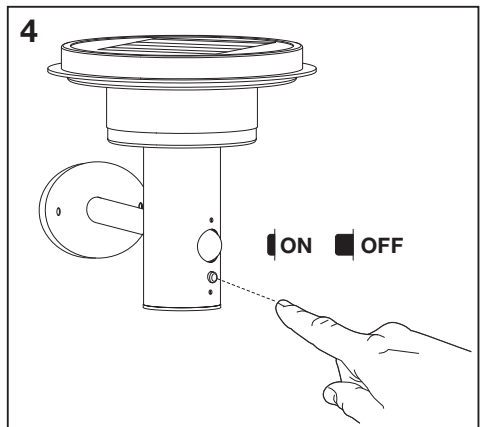
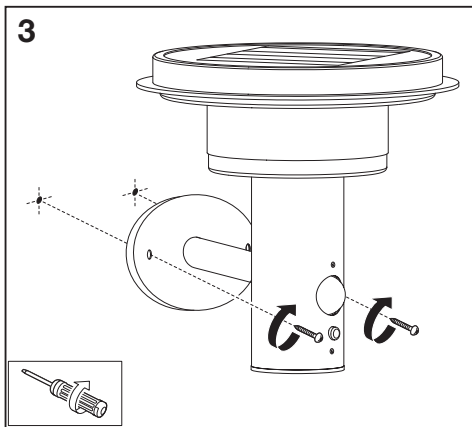
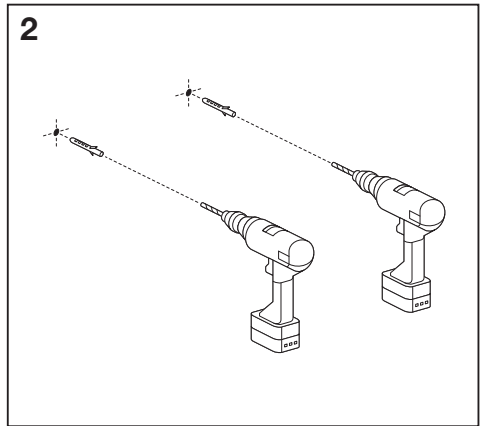
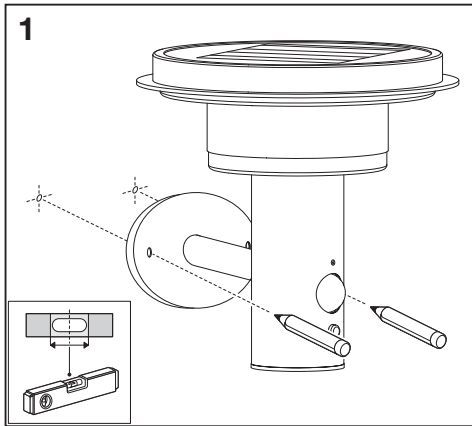
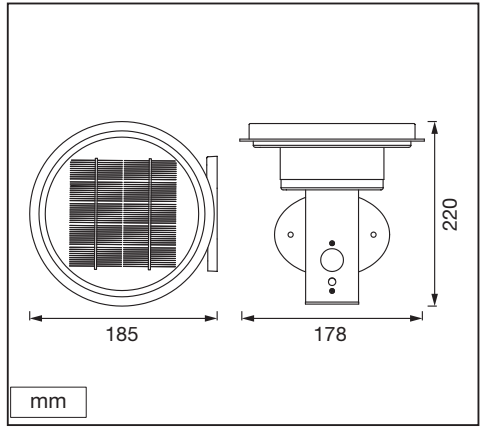
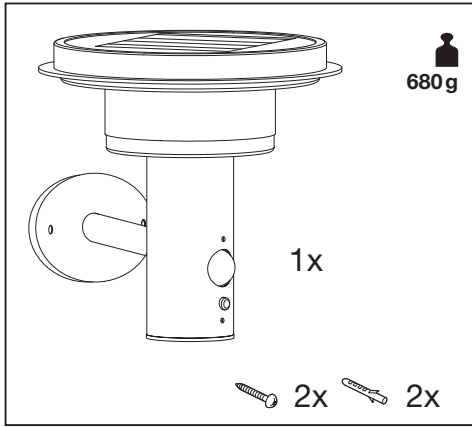

**ENDURA® STYLE
SOLAR WALL SENSOR
DOUBLE CIRCLE**



	EAN	W max.	Lm max.	K	IP	° (°C)	V- max.	👤
ENDURA® STYLE SOL WALL 2CIRCLE 6W ST	4058075392687	6.3	400	3000	44	-20...+40	3.2	680 g
ENDURA® STYLE SOL WALL 2CIRCLE 6W BK	4058075392724	6.3	400	3000	44	-20...+40	3.2	680 g

SOLAR WALL SENSOR DOUBLE CIRCLE



5 Mode 1

200 Lumen

1. Press for 3 sec 2. Press for 1 sec

ON OFF

1 2 3

6 Mode 2

300 Lumen 75 Lumen

15 sec

Mode 3

400 Lumen OFF

15 sec

7

2m 90° 6m max

LUX

ON

0-50 Lux

LUX

OFF

50-100 Lux

8 Charging

In shade will not charge fully

8h

min. 8h
(sunshine > 30.000Lux)

+40°

-20°



IP44 RoHS

C10449057
G11085961
18.10.2019



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com