


# PRODUCT DATASHEET

## ENDURA STYLE SOLAR BOUQUET 50cm Post sensor stainless steel

ENDURA STYLE SOLAR BOUQUET | Solar-powered wall and bollard with motion and light sensor

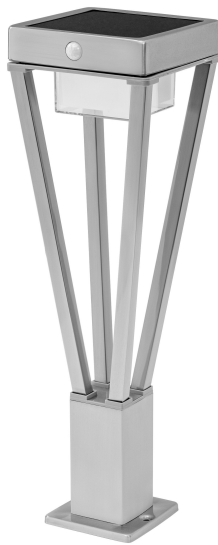

---

### Areas of application

- Outdoor use (IP44)
- Areas where no power supply is available

---

### Product benefits

- Demand based lighting and energy saving thanks to motion and daylight sensor
- Easy adjustment of daylight and motion detection via push switch
- Energy-efficient thanks to LED technology
- Easy and quick installation

---

### Product features

- Solar powered outdoor LED luminaire
- PIR motion detector and daylight sensor
- 3 operating modes selectable
- Operating mode 1: light continuous on with 200 lumen (Max. 2.5 hours at full charge)
- Operating mode 2: light continuous on with 75 lumen (Max. 8 hours at full charge), switches to 300 lumen when moving (Max. 100 times lit at full charge)
- Operating mode 3: light off, switches to 550 lumen when moving (max. 100 times lit at full charge)



- Battery charging via solar panel
- Battery technology: lithium-ion
- Stainless steel housing

## TECHNICAL DATA

### Electrical data

Nominal wattage	6.00 W
Nominal voltage	3 V
Mains frequency	50...60 Hz
Nominal current	1.7 mA
Protection class	III
Operating mode	Battery

### Photometrical data

Luminous flux	550 lm
Luminous efficacy	92 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	< 6 sdcn
Flickering metric (Pst LM)	≤1 %
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0

### Dimensions & Weight

Length	150.00 mm
Width	150.00 mm
Height	500.00 mm
Product weight	1120.00 g

### Materials & Colors

Product color	Stainless steel
Housing color	Steel
Body material	Aluminum

Cover material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+70 °C
Type of protection	IP44
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Surface
Mounting location	Ground
Application environment	Outdoor
LED module replaceable	Not replaceable

### Lifespan

Lifespan L70/B50 at 25 °C	25000 h
Number of switching cycles	12500

### Sensor

Type of sensor	Light / Motion
Sensor technology	Passive infrared (PIR)
Sensor detection angle	90 °
Sensor controlled switching time	15 s
Sensor IP rating	IP44

### Emergency lighting

Type of emergency light operation	Non-maintained
Luminous flux in maintained operation mode	-
Luminous flux in emergency operation mode	-
Nominal voltage of battery	3.7 V

### Certificates & Standards



Standards	EMC / ROHS / REACH / Acc. to EN 60598 / Acc. to IEC 62471
-----------	---

### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

---

**DOWNLOAD DATA**

DOWNLOAD DATA	
	User instruction ENDURA STYLE
	Declarations of conformity EC_ENDURA STYLE SOL BOUQUET

---

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075564527	Folding box 1	162 mm x 162 mm x 512 mm	1340.00 g	13.44 dm <sup>3</sup>
4058075564534	Shipping box 4	340 mm x 340 mm x 540 mm	6016.00 g	62.42 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.