

PRODUCT DATASHEET

LUNETTA Hall White

LUNETTA® Hall | Socket nightlight with tilt function



Areas of application

- Children's bedrooms
- Decorative domestic lighting
- For indoor use only

Product benefits

- Attractive and functional design
- Plug and Play due to EU Plug
- Automatically switches on and off according to the amount of available daylight
- Light direction individually adjustable

Product features

- Integrated day/night sensor
- Direct connection to a 220...240 V AC supply



TECHNICAL DATA

Electrical data


| | |
|------------------|---------------|
| Nominal wattage | 0.20 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Nominal current | 16.000 mA |
| Protection class | II |
| Operating mode | Mains voltage |

Photometrical data

| | |
|---------------------------|------------|
| Luminous flux | 3 lm |
| Color temperature | 3000 K |
| Light color (designation) | Warm White |
| Color rendering index Ra | > 80 |

Dimensions & Weight

| | |
|----------------|----------|
| Length | 65.00 mm |
| Width | 84.00 mm |
| Height | 73.00 mm |
| Product weight | 55.00 g |

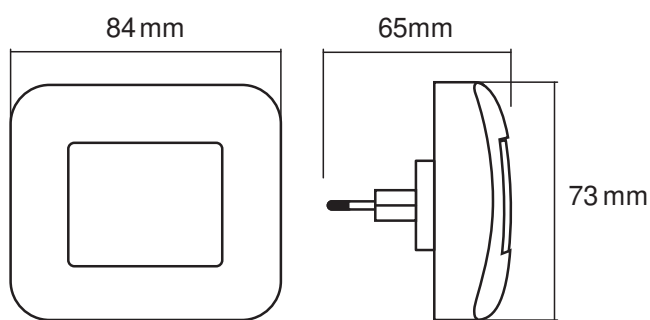

Product line drawing with numbers

Product line drawing with numbers

Materials & Colors

| | |
|---------------|-------|
| Product color | White |
|---------------|-------|



| | |
|---------------------------------|--------------------|
| Housing color | White |
| Body material | Polycarbonate (PC) |
| Light emitting surface material | Plastic |
| Mercury content | 0.0 mg |

Application & Mounting

| | |
|--|------------------|
| Ambient temperature range | -20...+40 °C |
| Type of connection | Plug type C (EU) |
| Type of protection | IP20 |
| Protection class IK (shock resistance) | IK02 |
| Dimmable | No |
| Mounting type | Surface |
| Mounting location | Socket |
| Application environment | Indoor |
| LED module replaceable | Not replaceable |
| With light source | Yes |

Lifespan

| | |
|----------------------------|---------|
| Lifespan L70/B50 at 25 °C | 25000 h |
| Number of switching cycles | 10000 |

Sensor

| | |
|----------------|-------|
| Type of sensor | Light |
|----------------|-------|

Certificates & Standards

| | |
|-----------|----|
| Standards | CE |
|-----------|----|

DOWNLOAD DATA

| |
|----------------------|
| DOWNLOAD DATA |
|----------------------|



Declarations of conformity

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075730120 | Folding box 1 | 71 mm x 109 mm x 153 mm | 77.00 g | 1.18 dm ³ |

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075730137 | Shipping box 6 | 437 mm x 127 mm x 185 mm | 744.00 g | 10.27 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

