

## Start Surface IP66 Ø300mm START SURFACE IP66 1100LM 840 IK10 WHT 0049287



### Product features

- LED exterior surface mounted luminaire, 1100lm, 12W power consumption, 92lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant



### PRODUCT OVERVIEW

Product name	START SURFACE IP66 1100LM 840 IK10 WHT
Technology	LED
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274498
E-number SE	7505131
Warranty	5 years
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492872

### DATA TABLE

#### General data

Product name	START SURFACE IP66 1100LM 840 IK10 WHT
Technology	LED
Housing	PC Polycarbonate

## Start Surface IP66 Ø300mm START SURFACE IP66 1100LM 840 IK10 WHT 0049287

Environment	Indoor, Outdoor
General application	Hospitality
Operating temperature range (°C)	-20°C - 45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4274498
E-number SE	7505131
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	12
Mains voltage (V)	220-240V
Lamp power factor	0.5
Electrical protection	Class II
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	15.7
Inrush Duration (µs)	68
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	42
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	70
Max. Luminaires per 10A B Breaker	40
Max. Luminaires per 13A B Breaker	48
Max. Luminaires per 16A B Breaker	57
Max. Luminaires per 20A B Breaker	68

### Lifetime data

Lifespan L70 B50	50000
------------------	-------

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP66

## Start Surface IP66 Ø300mm *START SURFACE IP66 1100LM 840 IK10 WHT* 0049287

IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	300
Nominal Product Width (mm)	300
Nominal Product Height (mm)	90
Nominal Product Diameter (mm)	300
Weight (kg)	0.78



### Packaging

Single packaging type	Carton
Product EAN number	5410288492872
Packaging single length / height (cm)	30.2
Packaging single width (cm)	9.9
Packaging single depth (cm)	30.5
DUN14 (outer)	15410288492879
Units per outer package	6
Packaging outer length / height (cm)	61.5
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	32.0

### Safety data

Optimal operating condition (°C)	-20-45
----------------------------------	--------

## PHOTOMETRY

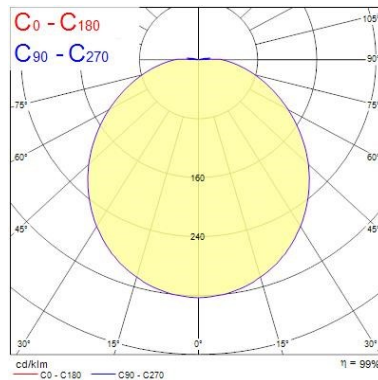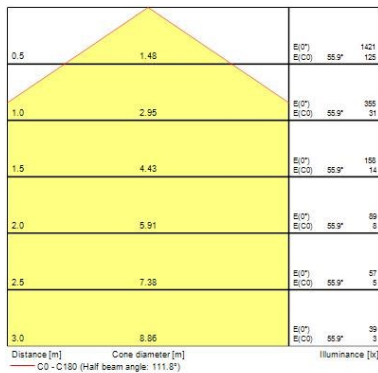


Start Surface IP66 Ø300mm  
*START SURFACE IP66 1100LM 840 IK10 WHT*  
 0049287

0.5	1.23 0.88	E(0°) E(C90) E(C0)	980 120 207
1.0	2.47 1.76	E(0°) E(C90) E(C0)	245 30 52
1.5	3.70 2.64	E(0°) E(C90) E(C0)	109 13 23
2.0	4.94 3.53	E(0°) E(C90) E(C0)	61 8 13
2.5	6.17 4.41	E(0°) E(C90) E(C0)	39 5 8
3.0	7.41 5.29	E(0°) E(C90) E(C0)	27 4 6

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 82.8°)  
 — C90 - C270 (Half beam angle: 102.0°)

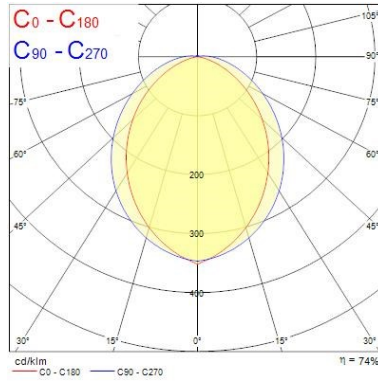

## TECHNICAL DRAWINGS

