


Gizmo Solar-DC Garden Torch

GIZMO SOLAR - DC GARDEN TORCH
0054044



Product features

- Beautiful lantern light with stunning flickering flame effect helps to create a cosy atmosphere in the garden or indoors
- Suitable for indoor and outdoor illumination as the product can operate on a dual-power mode - solar and rechargeable battery
- Integrated daylight sensors
- Automatic light management - light up automatically when it gets dark after detecting any motion
- Easy installation - no direct mains wiring or connection required
- Lumen output- 78lm
- Long rated lifetime - 25,000 hours
- ON/OFF switch
- Robust construction - ABS housing
- Perfect for gardens, flower beds, pathways, living rooms, corridors, staircase as a stand out feature
- Colour temperature - Candlelight 1500K
- Operating temperature: -10°C to 45°C

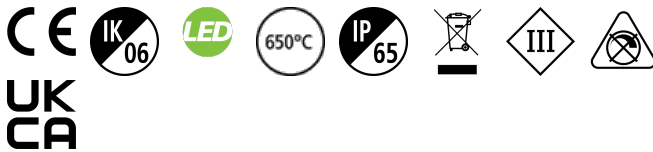

PRODUCT OVERVIEW

| | |
|---------------------------------|-------------------------------|
| Product name | GIZMO SOLAR - DC GARDEN TORCH |
| Technology | LED |
| Cap/Base | N/A |
| Housing | ABS Plastic |
| Mount | Ground mounted |
| General application | Residential & Consumer |
| ETIM Class | N/A |
| Warranty | 3 years |
| Fixture luminous flux (lm) | 78 |
| Luminaire efficacy (lm/W) | 39 |
| Colour temperature (K) | 1500 |
| Light colour | Candlelight |
| Colour Variation Initial (SDCM) | SDCM6 |
| Photobiological Risk Group | RG0 |
| Electrical protection | Class III |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Housing colour | Black |
| IP rating | IP65 |
| IK rating | IK06 |
| Product EAN number | 5410288540443 |
| Dimming method | N/A |
| Light source included | INTEGRATED LED |

Gizmo Solar-DC Garden Torch

GIZMO SOLAR - DC GARDEN TORCH
0054044

DATA TABLE

General data

| | |
|-----------------------------------------|-------------------------------|
| Product name | GIZMO SOLAR - DC GARDEN TORCH |
| Technology | LED |
| Cap/Base | N/A |
| Housing | ABS Plastic |
| Mount | Ground mounted |
| General application | Residential & Consumer |
| Operating temperature range (°C) | -10°C - 40°C |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | N/A |
| Warranty | 3 years |

Optical data

| | |
|---------------------------------|-------------|
| Fixture luminous flux (lm) | 78 |
| Luminaire efficacy (lm/W) | 39 |
| Colour temperature (K) | 1500 |
| Light colour | Candlelight |
| Colour Variation Initial (SDCM) | SDCM6 |
| Distribution type | None |
| Photobiological Risk Group | RG0 |

Electrical data

| | |
|------------------------|-----------------------------|
| Mains voltage (V) | 5V |
| Electrical protection | Class III |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Drive current (mA) | 530 |
| Glow Wire Test (°C) | 650 |
| Nominal Frequency (Hz) | N/A |

Lifetime data

| | |
|------------------|-------|
| Lifespan L70 B50 | 25000 |
|------------------|-------|

Physical data

| | |
|-------------------------------|------------------|
| Housing colour | Black |
| IP rating | IP65 |
| IK rating | IK06 |
| Diffuser finish | Diffuse |
| Diffuser material | PC Polycarbonate |
| Reflector finish | None |
| Nominal Product Height (mm) | 706 |
| Nominal Product Diameter (mm) | 114 |
| Weight (kg) | 0.38 |

Packaging

Gizmo Solar-DC Garden Torch GIZMO SOLAR - DC GARDEN TORCH 0054044

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5410288540443 |
| Packaging single length / height (cm) | 12.8 |
| Packaging single width (cm) | 12.0 |
| Packaging single depth (cm) | 22.2 |
| DUN14 (outer) | 15410288540440 |
| Units per outer package | 6 |
| Packaging outer length / height (cm) | 38.0 |
| Packaging outer width (cm) | 27.0 |
| Packaging outer depth (cm) | 24.0 |

Safety data

| | |
|----------------------------------|--------|
| Optimal operating condition (°C) | -10-40 |
|----------------------------------|--------|

TECHNICAL DRAWINGS

