

PRODUCT DATASHEET

ENDURA FLOOD 30 W 4000 K DG

ENDURA FLOOD Cool White | Outdoor luminaires in 4000K



AREAS OF APPLICATION

- Outdoor
- Replacement for floodlights with halogen lamps
- Garages
- Building facades

PRODUCT BENEFITS

- Quick and simple installation thanks to low profile, compact and light weight design
- Energy savings of up to 80 % compared to halogen lamp floodlights
- Semi-frosted, tempered glass cover for uniform illumination

PRODUCT FEATURES

- Very bright and functional outdoor LED luminaires
- Symmetrical beam angle: 110° x 110°
- Mounting bracket for up to 180° tilting
- Type of protection: IP65
- Ambient temperature in operation: -20...+45 °C
- Connection via 1 m cable, wiring required



TECHNICAL DATA


Electrical data

| | |
|-----------------|-------------------------------|
| Nominal wattage | 30.00 W |
| Operating mode | ELECTRONIC CONTROL GEAR (ECG) |
| Nominal voltage | 220...240 V |
| Mains frequency | 50/60 Hz |

Photometrical data

| | |
|---------------------------|------------|
| Color temperature | 4000 K |
| Color rendering index Ra | ≥80 |
| Light color (designation) | Cool White |
| Luminous flux | 2700 lm |
| Luminous efficacy | 90 lm/W |

Dimensions & weight

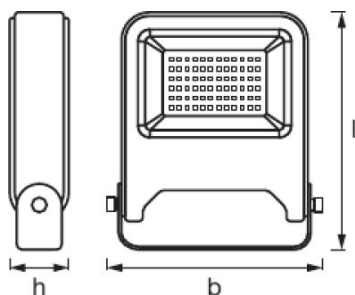

| | |
|----------------|----------|
| Length | 193.0 mm |
| Width | 170.0 mm |
| Height | 39.0 mm |
| Product weight | 650.00 g |

Colors & materials

| | |
|----------------|-----------|
| Body material | Aluminum |
| Housing color | Dark gray |
| Product color | Dark gray |
| Housing color | Dark gray |
| Cover material | Glass |

Temperatures & operating conditions

| | |
|---------------------------|--------------|
| Ambient temperature range | -20...+45 °C |
|---------------------------|--------------|

Additional product data

| | |
|-------------------|---------|
| Mounting type | Surface |
| Mounting location | Wall |


Capabilities

| | |
|------------------------|-----------------|
| Dimmable | No |
| Type of connection | Cable, 3-pole |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|--------------------|-------------------|
| Protection class | I |
| Type of protection | IP65 |
| Standards | CE/EAC/REACH/RoHS |

Light Distribution

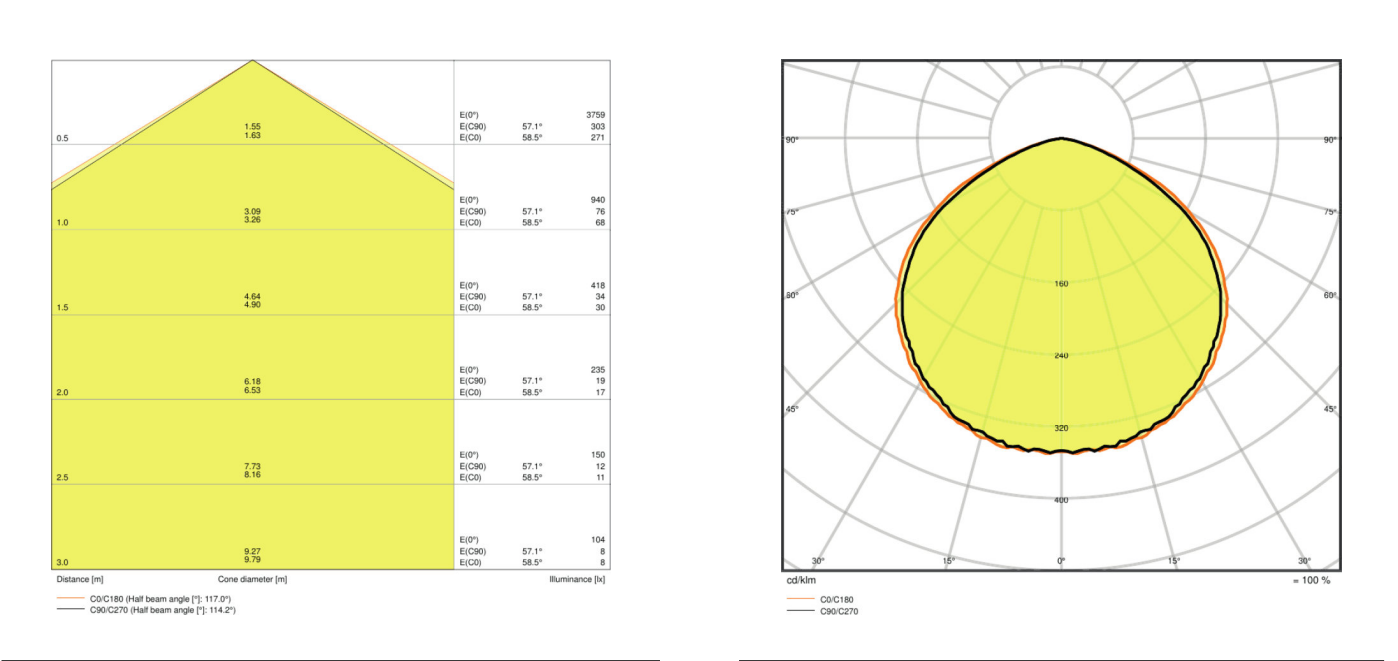

LDC typ cone

LDC typ polar

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075206700 | Folding carton box 1 | 60 mm x 177 mm x 204 mm | 694.00 g | 2.17 dm ³ |
| 4058075206717 | Shipping carton box 12 | 365 mm x 190 mm x 425 mm | 8732.00 g | 29.47 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.