

TYREinflate 1000



Rapid Inflation Time

Inflate the tire to the desired pressure in ca. 2 minutes**



Wind-up Cable

Winding/unwinding mechanism for a neatly rolled up cable



LED Light

Easy to operate even in darkness and in low light conditions



Rapid tyre inflator with wind-up cable

The OSRAM Tyreinflate 1000 is a rapid digital tyre inflator with a backlit digital display for easy, accurate pressure readings. Includes an auto stop feature to get the exact desired pressure needed to accurately inflate your tyres. The auto set on the Tyreinflate 1000 is incredibly easy to set up - just turn the dial to the pressure you require, click to set, then press start. The inflator will automatically stop once the correct pressure has been reached. A wind-up power cable eliminates messy wires and a 2.5 minute inflation time* gets you on the road and where you need to be quickly. The power cable is long enough (3.5 m) to reach all tyres around your vehicle. The large on/off button and the LED directional light make the Tyreinflate 1000 easy to use in darkness and emergencies - keeping you prepared for whatever may happen on the road. Includes 3-piece adaptor for bicycles, balls and other inflatables.**based on inflating a 13" tyre from flat to 2.41 BAR

Product datasheet

Technical data


Product information

Order reference	OTI1000
Inflation time	2 min
Max Pressure	5.5 bar
Air Hose Length	70 cm
Deflation valve	Yes
Retractable 12V Cable	Yes
Power Cord Length	3.5 m
Charge Time (h)	N/A
LED Light	Yes
Display Size	76 x 48 mm
Measuring Units	PSI, kPa, bar
Preset Function	Yes
Auto stop	Yes
Storage Case	Yes
Accuracy (bar)	±0.1 bar
Flow rate (l/min)	tbc

Electrical data

Nominal wattage	180.00 W
Nominal voltage	11.1 V
Operating Voltage	12V
Power Source	12V Fused Plug

Dimensions & weight

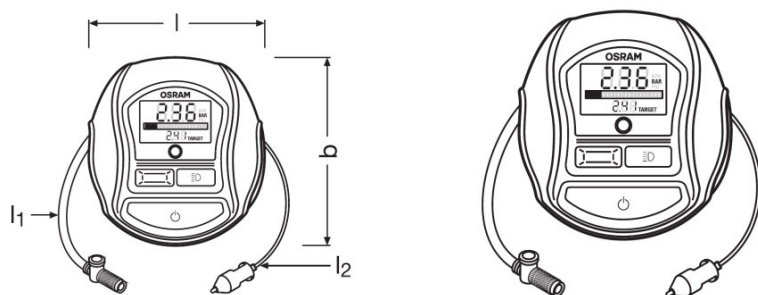

Length	225.0 mm
Width	205.0 mm

Product datasheet

Height	95.0 mm
--------	---------

Additional product data

Display Type	Digital
Noise Level (dB)	90 dB
USB Socket 2.1A (For other Devices)	No
Recommended to Use With	Car, Small Van, 4X4, Large Van, Trailer

Capabilities

Accessories	Adaptors for: Balls, Air Mattress, Bikes
Fuse	15 A

Country specific categorizations

Order reference	OTI1000
-----------------	---------



Detail



Detail



Detail



Detail



Detail



Detail

Product datasheet





Detail

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899620223	TYRE inflate 1000	Folding carton box 1	232 mm x 95 mm x 216 mm	4.76 dm ³	1625.80 g
4062172166539	TYRE inflate 1000	Shipping carton box 4	406 mm x 249 mm x 273 mm	27.60 dm ³	6903.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File
 Product movie TyreInflate How to Video (EN)
 Product movie TyreInflate 1000 Product Video (EN)

Safety advice

Product won't exceed noise levels of more than 90 dB

Legal advice

CE and EAC compliant

* for precise conditions please refer to: www.osram.com/am-guarantee

** based on inflating a 13" tyre from flat to 2.41 BAR

Application advice:

Product datasheet

For more detailed application information and graphics please see product datasheet.

Disclaimer:

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.