

Artikel

Article Number 400111
Model LED-Röhre

Shape Röhre
Manufacturer Müller-Licht
Brand MÜLLER-LICHT
Size 28x1500 mm
Net weight 153 g
Housing material PC weiß
Socket G13
Customs tariff number 8539500000
Disposal obligation



ElektroG 


Elektrische Daten

Operating voltage 220-240 V
Nominal power intake 22 W
Rated power intake 22.0 W
Nominal service life 25,000 h
Rated service life 25,000 h
Nominal grid frequency 50 Hz
Nominal current 180 mA
Type of power AC
Energy efficiency class A+
Elect. power factor 0.500
Weighted power consumption 22kWh/1000h
Ignition time 0.5 s
Switching cycles until outage 100,000 x
Premature outage rate 1000h 5%
Service life factor 6000h 0.900
Dimmable nein

Lichttechnische Daten

Nominal light current 2000 lm
Rated light current 360° 2000 lm
Nominal half-value angle 150°
Rated half-value angle 150°
Rated light yield initial 90.909lm/W
Colour temperature (F) 4000 K
Light color coolwhite
Color rendering Ra≥80
Colour consistency initial 6
Warm-up time to 60% max. light current 60% < 1s
Lumen maintenance factor 6000h BLD 0.800
Lumen maintenance factor NLD 0.700
Photometric coding 840 / 608

Lichtspektrum

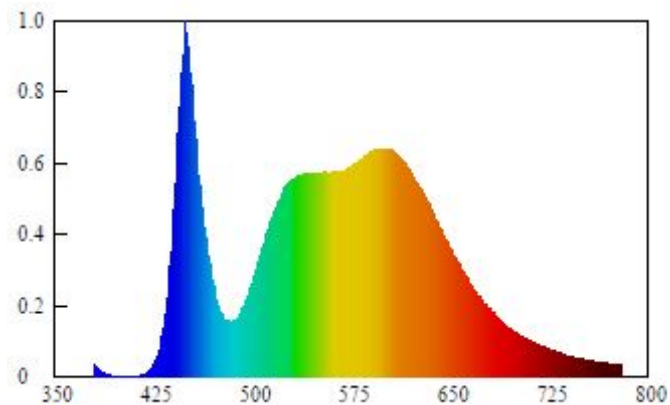

Verpackung

Packaging type

Packaging unit

Barcode

Transport box number VE

Transport box barcode


Box

1

4018412327017

5

4018412327024

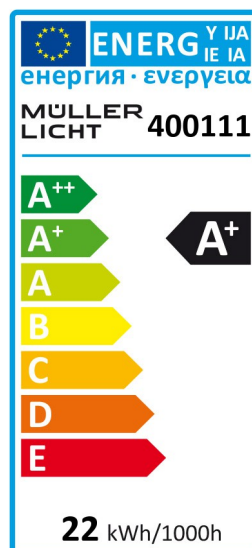

Category

Description

LED Röhre

22W 220-240V G13 2000lm 150° 4000K PC Röhre 1500mm