



CorePro LEDspot MV

CorePro LEDspot 4-35W GU10 840 36D DIM

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots deliver significant energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	4-35W
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	270 lm
Luminous Flux (Rated) (Nom)	270 lm
Luminous Intensity (Nom)	540 cd
Color Designation	Cool White (CW)
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	67.50 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux In 90° Cone (Rated)	270 lm


Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	4 W
Lamp Current (Nom)	19 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	4 kWh

CorePro LEDspot MV

Product Data	
Full product code	871869673022500
Order product name	CorePro LEDspot 4-35W GU10 840 36D DIM
EAN/UPC - Product	8718696730225
Order code	929001364002
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10
Material Nr. (12NC)	929001364002
Net Weight (Piece)	0.038 kg


Dimensional drawing




GU10 230V 4-35W 270lm 36D 4000K GU10 D

Product	D	C
CorePro LEDspot 4-35W GU10 840 36D DIM	50 mm	54 mm

Photometric data



Technical Information 11 Philips Lighting B.V. Page 107

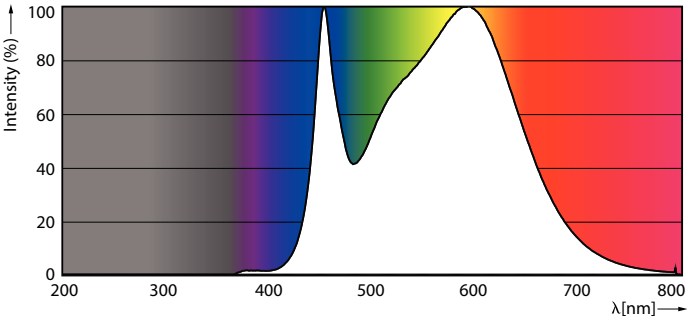

CorePro LEDspotMV 25W GU10 840 36D

