

Artikel

Article Number 400115
Model LED-Röhre



Shape Röhre
Manufacturer Müller-Licht
Brand MÜLLER-LICHT
Size 28x600 mm
Net weight 150 g
Housing material PC
Socket G13
Customs tariff number 8539500000
Disposal obligation



ElektroG

Elektrische Daten

Operating voltage 220-240 V
Nominal power intake 10 W
Rated power intake 10.0 W
Nominal service life 30,000 h
Rated service life 30,000 h
Nominal grid frequency 50 Hz
Nominal current 82 mA
Type of power AC
Energy efficiency class A+
Elect. power factor 0.530
Weighted power consumption 10kWh/1000h
Ignition time 0.5 s
Switching cycles until outage 100,000 x
Premature outage rate 1000h 5%
Service life factor 6000h 0.900
Dimmable nein

Lichttechnische Daten


Nominal light current 880 lm
Rated light current 360° 880 lm
Nominal half-value angle 150°
Rated half-value angle 165°
Rated light yield initial 88lm/W
Colour temperature (F) 6500 K
Light color daylight
Color rendering Ra≥80
Colour consistency initial 6
Warm-up time to 60% max. light current 60% < 1s
Lumen maintenance factor 6000h BLD 0.800
Lumen maintenance factor NLD 0.700
Photometric coding 865 / 608

Verpackung

Packaging type Box
Packaging unit 1

Barcode
Transport box number VE
Transport box barcode

4018412327093
5
4018412327109

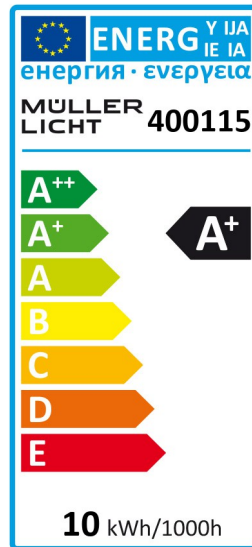

Category
Description

LED Röhre
10W 220-240V G13 880lm 150° 6500K PC Röhre 600mm