

PRODUCT DATASHEET

ENDURA PRO SPOT SENSOR 16 W 1500 840 IP55 DG

ENDURA PRO SPOT SENSOR | High efficiency wall sensor luminaires with narrow beam angle in innovative optical design



AREAS OF APPLICATION

- Outdoor
- Entrance areas
- Arcade passage

PRODUCT BENEFITS

- Small spotlight for precise illumination
- Lighting according to requirements due to adjustable luminaire head
- Easy and quick installation

PRODUCT FEATURES

- 4 operating modes selectable (light 6h continuous on, standby, switch-on by movement or dusk)
- Adjustable luminaire head
- Type of protection: IP55
- Impact resistance: IK05
- Protection class: II



TECHNICAL DATA

Electrical data

Nominal wattage	16.00 W
Operating mode	Mains voltage
Nominal voltage	220...240 V
Mains frequency	50/60 Hz


Photometrical data

Color temperature	4000 K
Color rendering index Ra	≥80
Light color (designation)	Cool White
Luminous flux	1500 lm
Luminous efficacy	94 lm/W

Luminaire sensor data

Type of sensor	Light / Motion
Sensor technology	Passive infrared (PIR)
Sensor detection angle	180 °
Detection range of motion sensor	12 m
Detection threshold of daylight sensor	1...1000 lx
Sensor controlled switching time	2 s...15 min

Dimensions & weight

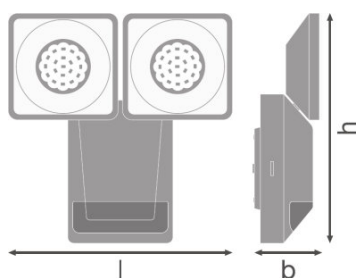

Length	177.0 mm
Width	58.0 mm
Height	187.0 mm
Product weight	415.00 g

Colors & materials

Body material	Polycarbonate (PC)
Housing color	Dark gray
Product color	Dark gray
Housing color	Dark gray

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
----------------------------------	--------------

Additional product data

Mounting type	Surface
Mounting location	Wall

Capabilities

Dimmable	No
Type of connection	Cable, 2-pole
LED module replaceable	Not replaceable

Certificates & standards

Protection class	II
Type of protection	IP55
Standards	CE/EAC/REACH/RoHS

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075228924	Folding carton box 1	70 mm x 184 mm x 196 mm	454.00 g	2.52 dm ³
4058075228931	Shipping carton box 6	294 mm x 150 mm x 213 mm	2.91 g	9.39 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.